

FEATURES

- LOW INSERTION LOSS
- EXCELLENT VSWR
- STD 19" RACK INSTALLATION
- RoHS COMPLIANT

BENEFITS


- REDUCE PRODUCTION TEST TIME
- EFFICIENT CABLE AND COMPONENT MANAGEMENT
- PLAN FOR FUTURE EXPANSION
- REVERSIBLE OPTION FOR ADAPTER INSTALLATION

ELECTRICAL

FREQUENCY (MHz):	DC - 8000
IMPEDANCE:	50 Ω
INSERTION LOSS (dB):	
DC-6000 MHz	≤ 0.1
6000-8000 MHz	≤ 0.2
VSWR:	
DC-3000 MHz	≤ 1.15:1
3000-8000 MHz	≤ 1.25:1

MECHANICAL

CONNECTOR BODY:	BRASS, TRI-ALLOY PLATE
CONTACT PINS:	BERYLLIUM COPPER, GOLD PLATE
INSULATOR:	PTFE, ELECTRICAL GRADE
RACK PANEL:	ALUMINUM, CORROSION RESISTANT COATING
DURABILITY:	≥ 500 MATING CYCLES
WEIGHT:	2172 GRAMS

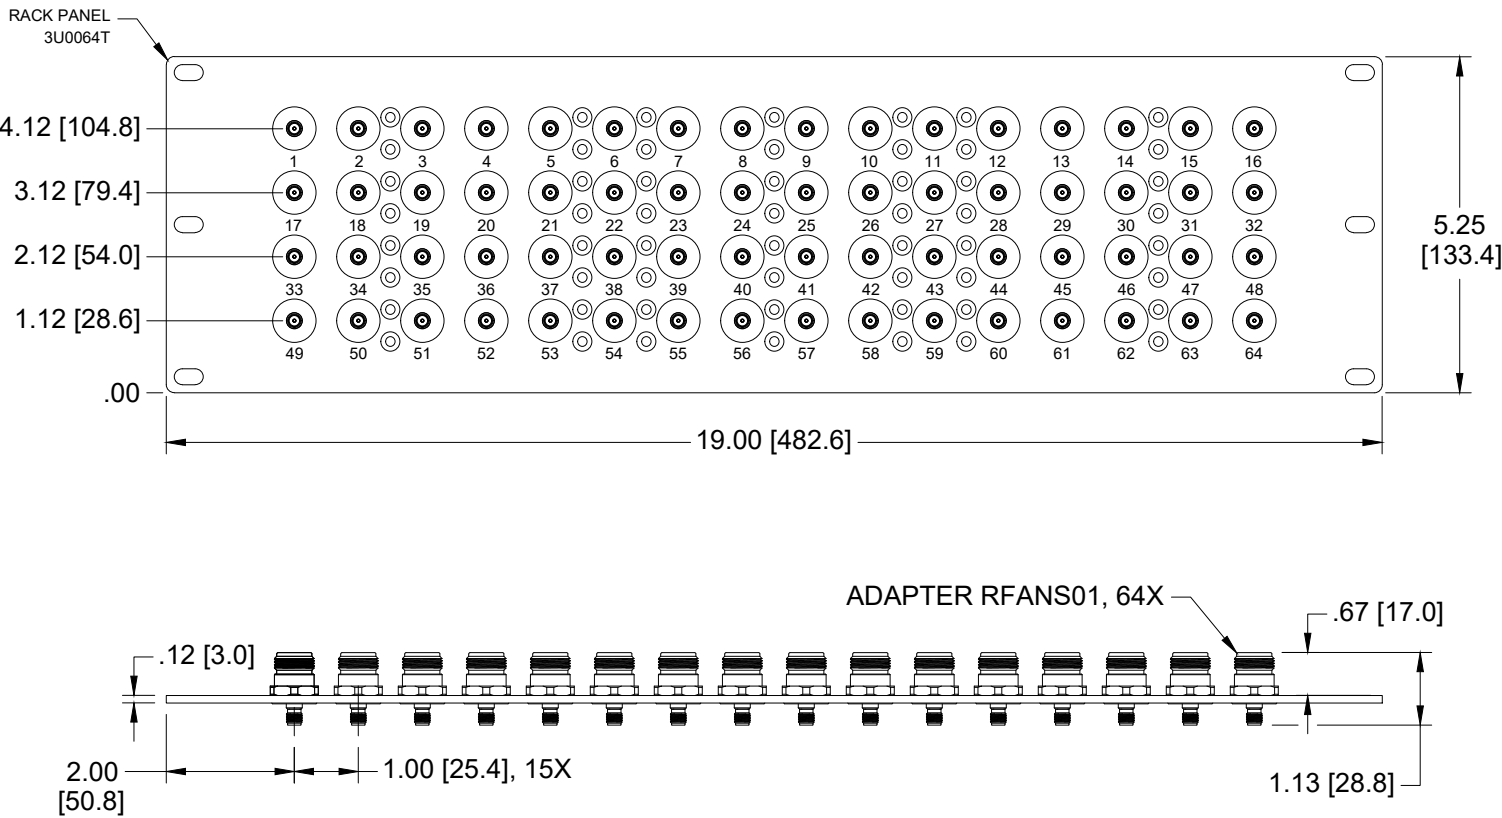

DIMENSIONS: INCH [MM]

AdvancedRf patch panel 64NSPP3U provides sixty-four N-female/SMA-female adapters for efficient organization and management of connections, and cable runs between components. ADVANCED RF between-series adapter RFANS01 can be installed in a mixed configuration if you need N and SMA connection points accessible from the same side. See our full selection of 1U-5U patch panels offered with N, SMA, QMA, TNC and BNC adapters. Our panel mounted assemblies can include any combination of ADVANCED RF adapters and splitters/combiners. Custom configurations available on request. Contact our sales team to discuss your requirements.